



Parámetros Eléctricos


Modelo	SL-FL01/400W
Tensión Nominal (V~)	85-300V AC
Consumo de potencia (W)	400W
Frecuencia Nominal (Hz)	50-60Hz
Factor de potencia	>0.6
IP	IP 66
Prote. Impacto	IK08
Lumen/watt	110Lm/w
Flujo Luminoso (Lm)	44000Lm
Temperatura de Color (°K)	6500K
Eficiencia Energética	A+
Tiempo de Vida	50000 Horas
Angulo de iluminación (°)	120°
IRC	≥80
Temperatura de Operación	-20°C a +40°C
Garantía	01 Año



**VALVULA ANTI
CONDENSACION**


Valvula que expulsa una possible condensacion de Agua.

Dimensiones

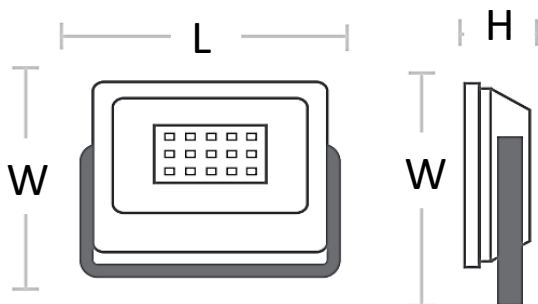

L(mm)	W(mm)	H(mm)
470mm	360mm	30mm

Fotometría

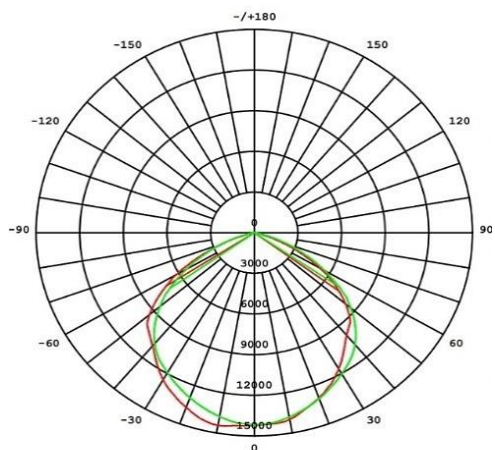


AVERAGE BEAM ANGLE (50%) : 110.4 DEG

Ventajas


- Ahorra más del 90% del consumo eléctrico.
- Reflector Slim SMD con mayor eficiencia luminosa.
- Con 50000 h de Uso Aprox.
- Cuerpo de Aluminio para mejor disipación de calor.
- Garantía 01 AÑO.

Instalación

1-Fasten the adjustable bracket with stainless steel screws




2-Connect the Main Line to the power wire of the lamp.



Note: before installation.

Only use a **round cable** supplied to connect this fitting. (6mm Diameter minimum.)



This is required in order to create a good water seal when connected to the fitting.

3-Ensure the terminal connection is made inside a suitable IP65 rated junction box.(not included)

From Floodlight	From IP65 Rated Junction Box
L = Brown	L = Brown or Red
⊕ = Green/Yellow	⊕ = Green/Yellow
N = Blue	N = Blue or Black