



Regulable Wall Pack LED

The LED Wall Pack combines energy efficiency, high performance and robust construction in an architecturally attractive form and Modern Engineering design.

The wall light package offers specific lumen output levels with quality optics to match lighting patterns and its ultra slim design offers a new concept of advanced technology.

The aluminum housing is coated with a durable, corrosion-resistant architectural brown finish. An IP65 ingress protection offers tight shielding against dust, moisture and airborne contaminants.

Exceptional durability and installation flexibility combined with sophisticated styling and superior performance make it a simple choice for all your wall lighting applications such as building entrances, Monuments, Stadiums, driveways, garages among other multiple uses.




Max.8M




Light Sensor




Hold Time
10s~+ ∞



Mounting Height
15 m Max.



Cluster-control
Version




Automatic
Dimming



5 Years
Guarantee

Regulable Led Wall Pack Light



Low profile design to complement any building exterior:

The Low Profile Wall Mount features a discreet design that will complement any building exterior. Three sizes are available in 30,40,60,80,100 and 120W output to accommodate multiple mounting heights. Low Profile Wall light delivers up to 120 lumens per watt for excellent energy savings over HID.

Benefits:

- Low profile design complements surroundings
- Full cutoff performance for optimal illumination
- Easy mounting for simple installation
- Long life and reduced maintenance


Features:

- Energy saving LED technology
- Available in three sizes to accommodate multiple mounting heights
- Architectural bronze finish
- 5 year limited warranty


Applications:

- Walkways
- Security Lighting
- Bridges, Monuments, Facades
- Residential


Regulable Led Wall Pack Light

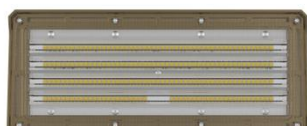

Usage scenario:

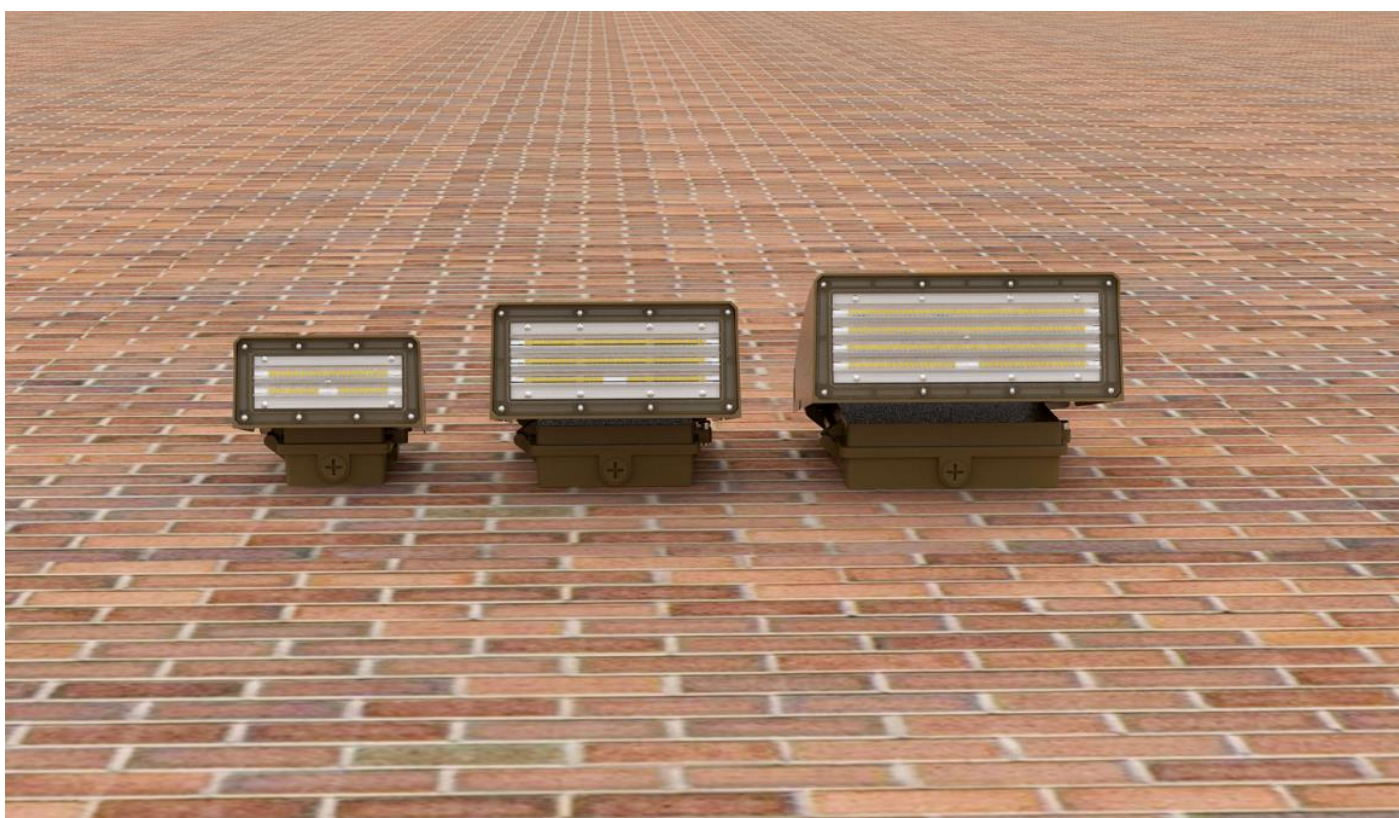

Regulable Led Wall Pack Light

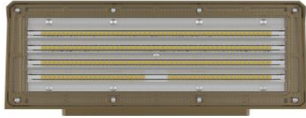

Line-Up

Model No.	Watts(W)	Luminaire Efficacy	Dimension(mm)	LED type	Light Color(K)	Beam Angle(Degree)
WPAD-30W	30	120LM/W	205 * 165 * 98	3030	4000K~5700K	60°85
WPAD-40W	40	120LM/W	205 * 165 * 98	3030	4000K~5700K	60°85
WPAD-60W	60	120LM/W	280 * 210 * 110	3030	4000K~5700K	60°85
WPAD-80W	80	120LM/W	280 * 210 * 110	3030	4000K~5700K	60°85
WPAD-100W	100	120LM/W	330 * 267 * 124	3030	4000K~5700K	60°85
WPAD-120W	120	120LM/W	330 * 267 * 124	3030	4000K~5700K	60°85

MANUAL THE INSTRUCTION :


Suitable for Junction Box Mounting Installation Instruction

<p>1.Loosen both sides screws</p>	<p>2.Use screwdriver to open the mounting cover</p>	<p>3.Fixed the mounting box on the J-BOX</p>
<p>4.Complete the wiring to the power source and ground</p>	<p>5.Tighten the screws for mounting box</p>	<p>6.Adjust the fixture's angle through both side screws</p>


Environmental Requirements:

Specifications	Values
Operational Temperature Range	-40~40℃
Preservation Temperature Range	-40~90℃
Operational Humidity Range	95%Rh or below (@-20~40℃)
Installation Area	Outdoor (Counter,Residential,Commercial,etc)

Regulable Led Wall Pack Light

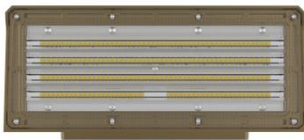


Mounting height guide

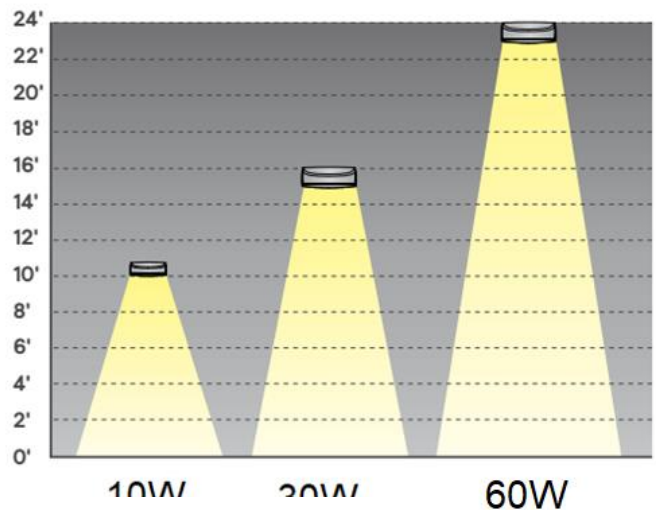

Optical distributions

30W at 15' mounting height.

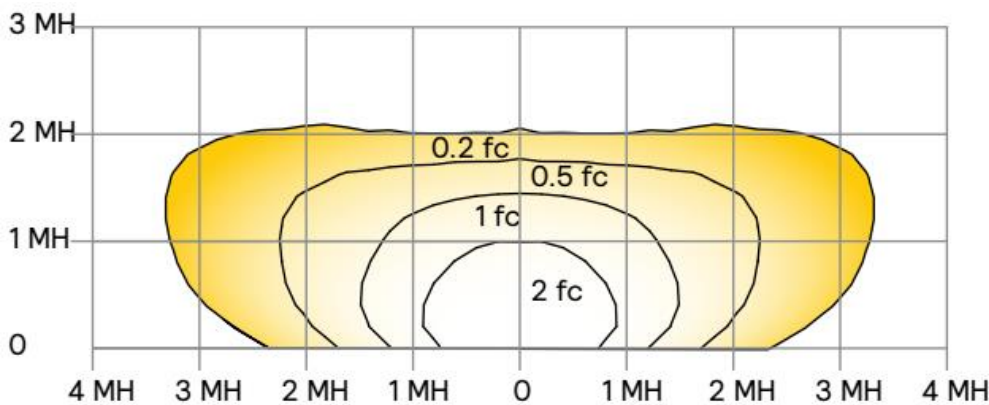

60W at 20' mounting height.

